

# NUC-C3 J3160

Intel® Celeron® J3160 Quad Core Processor  
Micro Firewall Appliance



## Features:


- ◇ All aluminum structure, fanless design;
- ◇ Onboard Intel Celeron J3160 quad core processor;
- ◇ Max. Support DDR3L 1600 8G RAM;
- ◇ Support 2\*MINI PCI-E Slot;
- ◇ Support 2\*HDMI;
- ◇ Support 4\*Intel 1000M LAN;
- ◇ Support OS:



## Specification

Model	NUC-C3 J3160
Color	Black (Color can be customized)
Material	High-quality all aluminum, surface anodic oxidation
Processor	Intel Celeron J3160 (Quad core quad threading, 1.6 GHz, Max turbo 2.24GHz)
RAM	Support 1*DDR3L 1600MHz SODIMM RAM Slot, Max. Support 8GB
Display Chip	Integrated Intel HD Graphics
Display Port	2*HDMI (Support synchronous/asynchronous dual display)
Front I/O	1*Power Switch, 1*Audio (Support Mic and Speaker at the same time), 2*USB3.0, 1*RJ45 COM (Support Console Function) 2*HDMI
Rear I/O	4*RJ45 LAN, 1*DC Input
Expansion Slot	Support 1*MINI PCIE Slot (Support USB Channel WIFI) Support 1*MINI PCIE Slot (Support MSATA)
Network	4*Intel i210-AT 1000M LAN
Storage	1*MSATA Slot
Input Voltage	Support DC 12V Input
Other Function	Auto power on when there is electricity, Timing boot, Wake on LAN, PXE boot, Watchdog (0~255 level) (Standard version doesn't set these function)
Work Temp	0°C ~ +50°C (Commercial HDD) , -20°C ~ +50°C (Industrial SSD) , Surface air flow
Work Humidity	5% ~ 95% non-condensing
Certificates	CE、 CCC、 FCC Class A、 ROHS
Dimension	115 * 107.5 * 39mm
Net Weight	0.5kg
Application	Business Office, HD Video Playback, Home Learning, Router, Network Security etc.

# NUC-C3 J3160 Drawing

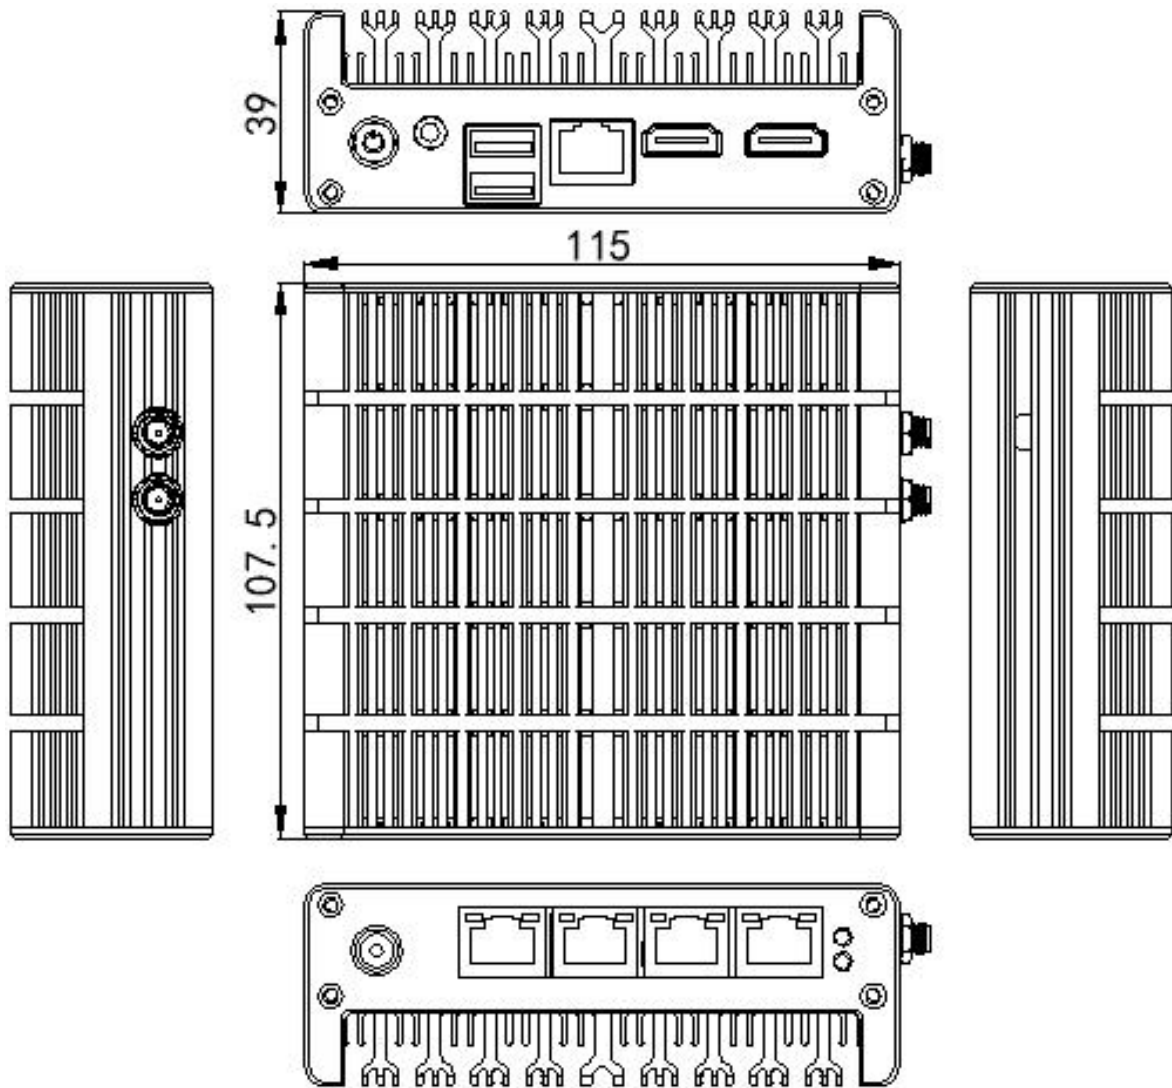

## Accessories List

Name	Quantity	Specification
Power Adapter	1	12V 4A
Power Cord	1	Any Plug Optional (China, US, EU, UK etc.)
VESA Bracket	1	Standard

## Order Information

Configuration 1	NUC-C3 J3160	Intel Celeron J3160	Standard Port, 4*LAN, 2*USB
-----------------	--------------	---------------------	-----------------------------